

产品介绍 PRODUCTS GUIDE




万能型减速机
UNIVERSAL SPEED REDUCER


速比1/5-1/60

WPW 	WPWD 	WPWK 	WPWDK 	WPWO 	WPWDO 
WPWA 	WPWDA 	WPWKA 	WPWDKA 	WPWX 	WPWDX 
WPWS 	WPWDS 	WPWKS 	WPWDKS 	WPWKO 	WPWDKO 
WPWT 	WPWDT 	WPWKT 	WPWDKT 		
WPWV 	WPWDV 	WPWKV 	WPWDKV 		

WPW 型

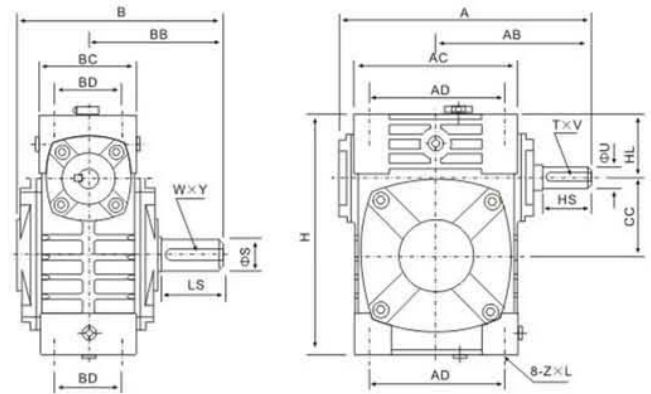


轴指向表示
SHAFT DIRECTION




型号 size	减速比 ratio	A	AB	B	BB	AC	BC	AD	BD	CC	HL	H	Z×L	输入轴input shaft			输出轴output shaft			重量 weight(kg)
														HS	U	T×V	LS	S	W×Y	
40	1/10	149	89	124	79	95	61	78	42	40	35	125	M6×12	25	12	4×2.5	28	14	5×3	4
50		175	107	150	97	111	68	85	50	50	35	150	M6×18	30	12	4×2.5	40	17	5×3	6.5
60		198	122	168	112	127	76	105	55	60	42	177	M8×20	40	15	5×3	50	22	6×3.5	9
70		231	140	194	131	152	86	125	65	70	55	215	M10×25	40	18	6×3.5	60	28	8×4	13
80	1/20	261	160	214	142	169	102	140	70	80	65	250	M12×28	50	22	6×3.5	65	32	10×5	21
100	1/25	322	190	254	169	216	117	180	90	100	80	310	M12×30	50	25	8×4	75	38	10×5	34
120	1/30	381	229	282	190	256	124	220	100	120	95	370	M14×32	65	30	8×4	85	45	14×5.5	51
135	1/40	433	260	317	210	296	147	260	110	135	105	425	M16×35	75	35	10×5	95	55	16×6	78
155	1/50	504	302	382	252	345	185	280	120	155	103	461	M16×35	85	40	12×5	110	60	18×7	102
175	1/60	545	325	402	262	374	192	320	140	175	123	521	M16×35	85	45	14×5.5	110	65	18×7	142
200		587	350	467	305	412	230	360	150	200	130	575	M20×36	95	50	14×5.5	125	70	20×7.5	202
250		705	420	552	360	500	285	420	190	250	150	700	M24×42	110	60	18×7	155	90	25×9	340
250																				

WPWA 型

WPWS 型

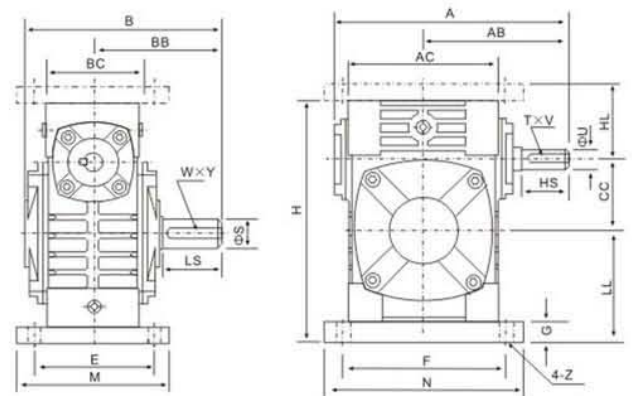


轴指向表示
SHAFT DIRECTION



型号 size	减速比 ratio	A	AB	B	BB	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	输入轴input shaft			出力轴output shaft			重量 weight(kg)
																		HS	U	T×V	LS	S	W×Y	
40	1/10	149	89	124	79	95	61	40	45	60	135	100	130	80	110	10	10	25	12	4×2.5	28	14	5×3	4.5
50		175	107	150	97	111	68	50	50	80	165	120	140	95	110	15	12	30	12	4×2.5	40	17	5×3	7.5
60		198	122	168	112	127	76	60	60	93	195	130	150	105	120	18	12	40	15	5×3	50	22	6×3.5	11.5
70		1/15	231	140	194	131	152	86	70	73	108	233	150	190	115	150	18	15	40	18	6×3.5	60	28	8×4
80	1/20	261	160	214	142	169	102	80	83	123	268	170	220	135	180	18	15	50	22	6×3.5	65	32	10×5	24
100	1/25	322	190	254	169	216	117	100	100	150	330	190	270	155	220	20	15	50	25	8×4	75	38	10×5	39
120	1/30	381	229	282	190	256	124	120	120	180	395	230	320	180	260	25	18	65	30	8×4	85	45	14×5.5	57
135	1/40	433	260	317	210	296	147	135	135	215	455	250	350	200	290	30	18	75	35	10×5	95	55	16×6	85
155	1/50	504	302	382	252	345	185	155	135	235	493	280	380	220	320	32	21	85	40	12×5	110	60	18×7	110
175	1/60	545	325	402	262	374	192	175	160	260	558	310	410	250	350	37	21	85	45	14×5.5	110	65	18×7	152
200		587	350	467	305	412	230	200	175	290	620	355	445	290	390	45	24	95	50	14×5.5	125	70	20×7.5	216
250		705	420	552	360	500	285	250	200	350	750	460	560	380	480	50	28	110	60	18×7	155	90	25×9	350
250																								


WPWX 型

WPWO 型

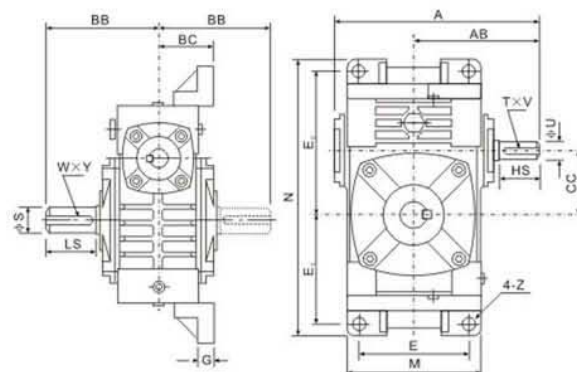

WPWX轴指向表示
SHAFT DIRECTION


WPWO轴指向表示
SHAFT DIRECTION



型号 size	减速比 ratio	A	AB	BB	BC	CC	M	N	E	E ₁	E ₂	G	Z	输入轴input shaft			出力轴output shaft			重量 weight(kg)
														HS	U	T×V	LS	S	W×Y	
40	1/10	149	89	79	45	40	95	187	70	72	97	12	10	25	12	4×2.5	28	14	5×3	5
50		175	107	97	50	50	111	226	90	90	110	14	12	30	12	4×2.5	40	17	5×3	8
60		198	122	112	55	60	127	257	100	102	129	15	12	40	15	5×3	50	22	6×3.5	11
70		231	140	131	65	70	152	305	120	120	155	20	15	40	18	6×3.5	60	28	8×4	15.5
80	1/20	261	160	142	70	80	174	350	140	140	180	20	15	50	22	6×3.5	65	32	10×5	24
100	1/25	322	190	169	90	100	224	410	190	165	215	22	15	50	25	8×4	75	38	10×5	38
120	1/30	381	229	190	100	120	264	494	220	195	255	25	18	65	30	8×4	85	45	14×5.5	56
135	1/40	433	260	210	110	135	304	559	260	230	285	30	18	75	35	10×5	95	55	16×6	84
155	1/50	504	302	252	140	155	345	605	290	250	305	35	21	85	40	12×5	110	60	18×7	129
175	1/60	545	325	262	150	175	374	675	320	273	348	40	21	85	45	14×5.5	110	65	18×7	157
200		587	350	305	175	200	424	749	370	305	390	40	24	95	50	14×5.5	125	70	20×7.5	224
250		705	420	352	200	250	510	920	440	375	475	45	28	110	60	18×7	155	90	25×9	374


WPWT 型

WPWV 型

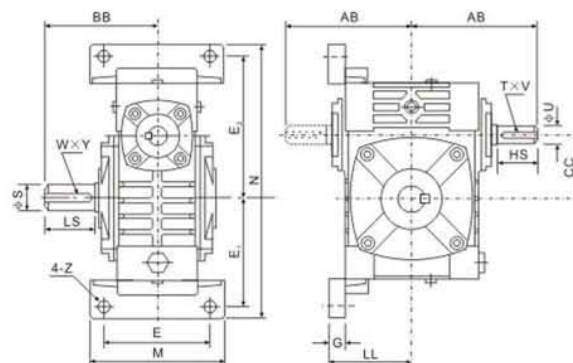

WPWV轴指向表示
SHAFT DIRECTION

WPWT轴指向表示
SHAFT DIRECTION





型号 size	减速比 ratio	AB	BB	CC	LL	M	N	E	E ₁	E ₂	G	Z	输入轴input shaft			出力轴output shaft			重量 weight(kg)
													HS	U	T×V	LS	S	W×V	
40	1/10	87	79	40	63	90	187	70	72	97	12	10	25	12	4×2.5	28	14	5×3	5
50		107	97	50	70	120	226	95	90	110	14	12	30	12	4×2.5	40	17	5×3	8
60		122	112	60	80	130	257	105	102	129	15	12	40	15	5×3	50	22	6×3.5	11
70		140	131	70	95	150	305	115	120	155	20	15	40	18	6×3.5	60	28	8×4	15.5
80	1/20	160	142	80	105	170	350	135	140	180	20	15	50	22	6×3.5	65	32	10×5	24
100	1/25	190	169	100	135	190	410	155	165	215	22	15	50	25	8×4	75	38	10×5	38
120	1/30	229	190	120	160	230	494	180	195	255	25	18	65	30	8×4	85	45	14×5.5	56
135	1/40	260	210	135	185	250	559	200	230	285	30	18	75	35	10×5	95	55	16×6	84
155	1/50	302	252	155	220	275	605	220	250	305	35	21	85	40	12×5	110	60	18×7	129
175	1/60	325	262	175	240	310	675	250	273	348	40	21	85	45	14×5.5	110	65	18×7	157
200		350	305	200	280	360	749	290	305	390	40	24	95	50	14×5.5	125	70	20×7.5	224
250		420	352	250	315	460	920	380	375	475	45	28	110	60	18×7	155	90	25×9	374

WPWD 型



轴指向表示
SHAFT DIRECTION

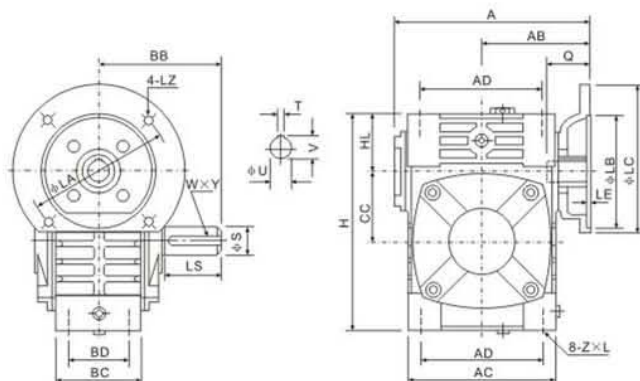



型号 size	入功率 input(kW)	减速比 ratio	A	AB	BB	AC	BC	AD	BD	CC	HL	H	Z×L	电机法兰flange				入力孔input hole				出力轴output shaft			重量 weight(kg)
														LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40	0.12	1/10	135	75	79	95	61	78	42	40	35	125	M6×12	115	95	140	4	M8	31	11	4×12.8	28	14	5×3	4
50	0.18		151	83	97	111	68	85	50	50	35	150	M6×18	115	95	140	4	M8	31	11	4×12.8	40	17	5×3	7
60	0.37		167	91	112	127	76	105	55	60	42	177	M8×20	130	110	160	4	M8	33	14	5×16.3	50	22	6×3.5	10
70	0.37		200	109										130	110	160		M8	40	14	5×16.3	60	28	8×4	14.5
	0.75		202	111	131	152	86	125	65	70	55	215	M10×25	165	130	200	4	M10	42	19	6×21.8				
80	0.75	1/15	225	125	142	169	102	140	70	80	65	250	M12×28	165	130	200	4.5	M10	48	19	6×21.8	65	32	10×5	23
	1.5																52	24	8×27.3						
100	1.5	1/20	280	148	169	216	117	180	90	100	80	310	M12×30	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5	36.5
120	2.2	1/25	333	181	190	256	124	220	100	120	95	370	M14×32	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	54
	3.0	1/30																							
135	3.0	1/40	375	202	210	296	147	260	110	135	105	425	M16×35	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	83
	4.0	1/50																							
155	5.5		448	247	252	345	185	280	120	155	103	461	M16×35	265	230	300	5	M12	83	38	10×41.3	110	60	18×7	110
	5.5																								
175	7.5	1/60	481	262	262	374	192	320	140	175	123	521	M16×35	265	230	300	5	M12	83	38	10×41.3	110	65	18×7	156
	7.5																								
200	11.0		543	285	305	412	230	360	150	200	130	575	M20×36	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	222
250	11.0	1/50																							
	15.0		615	330	360	500	285	420	190	250	150	700	M24×42	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	376

WPWDA 型

WPWDS 型



轴指向表示
SHAFT DIRECTION

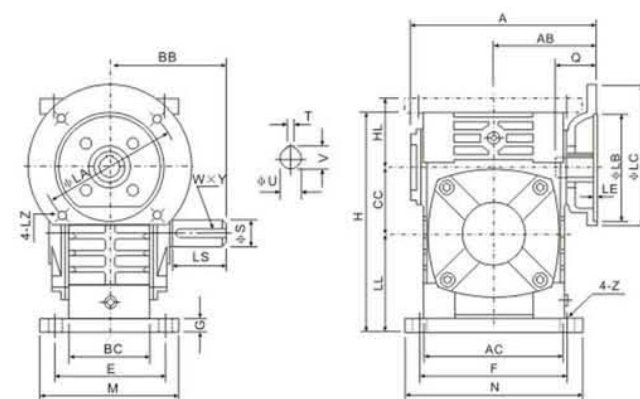


型号 size	入功率 input(kW)	减速比 ratio	A	AB	BB	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	电机法兰flange				入力孔input hole				出力轴output shaft			重量 weight(kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40	0.12	1/10	135	75	79	95	61	40	45	60	135	100	130	80	110	10	10	115	95	140	4	M8	31	11	4×12.8	28	14	5×3	5
50	0.18		151	83	97	111	68	50	50	80	165	120	140	95	110	15	12	115	95	140	4	M8	31	11	4×12.8	40	17	5×3	8
60	0.37		167	91	112	127	76	60	60	93	195	130	150	105	120	18	12	130	110	160	4	M8	33	14	5×16.3	50	22	6×3.5	12.5
70	0.37		200	109														130	110	160		M8	40	14	5×16.3				
	0.75		202	111	131	152	86	70	73	108	233	150	190	115	150	18	15	165	130	200	4	M10	42	19	6×21.8	60	28	8×4	17
80	0.75	1/15	225	125	142	169	102	80	83	123	268	170	220	135	180	18	15	165	130	220	4.5	M10	48	19	6×21.8	65	32	10×5	26
100	1.5																		52	24	8×27.3								
	1.5	1/20	280	148	169	216	117	100	100	150	330	190	270	155	220	20	15	165	130	220	4.5	M10	52	24	8×27.3	75	38	10×5	41.5
120	2.2		1/25	333	181	190	256	124	120	120	180	395	230	320	180	260	25	18	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5
	3.0	1/30																											
135	3.0		1/40	375	202	210	296	147	135	135	215	455	250	350	200	290	30	18	215	180	250	5	M12	63	28	8×31.3	95	55	16×6
	4.0	1/50																											
5.5	448		247	252	345	185	155	135	235	493	280	380	220	320	32	21	265	230	330	5	M12	83	38	10×41.3	110	60	18×7	118	
175	5.5		1/60	481	262	262	374	192	175	160	260	558	310	410	250	350	37	21	265	230	300	5	M12	83	38	10×41.3	110	65	18×7
	7.5																												
200	11.0		543	285	305	412	230	200	175	290	620	355	445	290	390	45	24	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	237
250	11.0	1/50																											
	15.0		615	330	360	500	285	250	200	350	750	460	560	380	480	50	28	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	395

WPWDX 型




WPWDO 型

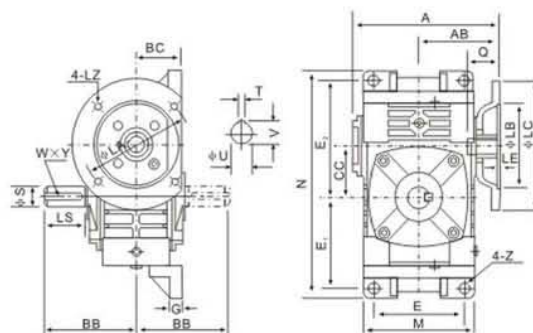

WPWDX轴指向表示
SHAFT DIRECTION

WPWDO轴指向表示
SHAFT DIRECTION




型号 size	入功率 input(KW)	减速比 ratio	A	AB	BB	BC	CC	M	N	E	E ₁	E ₂	G	Z	电机法兰flange				入力孔input hole				出力轴output shaft			重量 weight(kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y	
40	0.12	1/10	135	75	79	45	40	95	187	70	72	97	12	10	115	95	140	4	M8	31	11	4×12.8	28	14	5×3	5.4
50	0.18		151	83	97	50	50	111	226	90	90	110	14	12	115	95	140	4	M8	31	11	4×12.8	40	17	5×3	8.5
60	0.37		167	91	112	55	60	127	257	100	102	129	15	12	130	110	160	4	M8	33	14	5×16.3	50	22	6×3.5	12
70	0.37		200	109											130	110	160		M8	40	14	5×16.3				
	0.75		202	111	131	65	70	152	305	120	120	155	20	15	165	130	200	4	M10	42	19	6×21.8	60	28	8×4	17
80	0.75	1/15	225	125	142	70	80	174	350	140	140	180	20	15	165	130	200	4.5	M10	48	19	6×21.8	65	32	10×5	26
100	1.5	1/20																								
	1.5		280	148	169	90	100	224	410	190	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5	40.5
120	2.2	1/25	333	181	190	100	120	264	494	220	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	59
135	3.0	1/40																								
	3.0		375	202	210	110	135	304	559	260	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	89
155	5.5	1/50	448	247	252	140	155	345	605	290	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	110	60	18×7	138
175	5.5	1/60																								
	7.5		481	262	262	150	175	374	675	320	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	110	65	18×7	172
200	11.0		543	285	305	175	200	424	749	370	305	390	40	21	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	246
250	11.0	15.0																								
	15.0		615	330	360	200	250	510	920	440	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	410

WPWDT 型




WPWDV 型

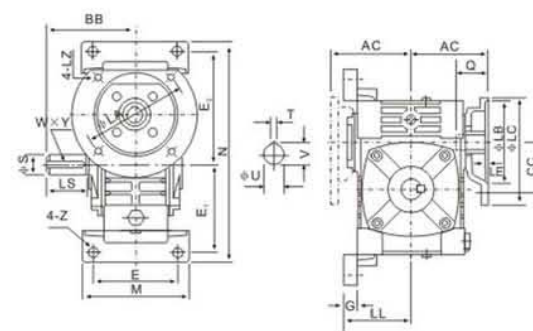

WPWDT轴指向表示
SHAFT DIRECTION

WPWDV轴指向表示
SHAFT DIRECTION





型号 size	入功率 input(KW)	减速比 ratio	AC	BB	CC	LL	M	N	E	E ₁	E ₂	G	Z	电机法兰flange				入力孔input hole				出力轴output shaft			重量 weight(kg)	
														LA	LB	LC	LE	LZ	Q	U	T×V	LS	S	W×Y		
40	0.12	1/10	75	79	40	63	90	187	70	72	97	12	10	115	95	140	4	M8	31	11	4×12.8	28	14	5×3	5.4	
50	0.18		83	97	50	70	120	226	95	90	110	14	12	115	95	140	4	M8	31	11	4×12.8	40	17	5×3	8.5	
60	0.37		91	112	60	80	130	257	105	102	129	15	12	130	110	160	4	M8	33	14	5×16.3	50	22	6×3.5	12	
70	0.37		109												130	110	160		M8	40	14	5×16.3				
	0.75		111	131	70	95	150	305	115	120	155	20	15		165	130	200	4	M10	42	19	6×21.8	60	28	8×4	17
80	0.75	1/15	125	142	80	105	170	350	135	140	180	20	15	165	130	200	4.5	M10	48	19	6×21.8	65	32	10×5	26	
100	1.5	1/20																								
	1.5		148	169	100	135	190	410	155	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	75	38	10×5	40.5	
120	2.2	1/25	181	190	120	160	230	494	180	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	85	45	14×5.5	59	
135	3.0	1/40																								
	3.0		202	210	135	185	250	559	200	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	95	55	16×6	89	
155	5.5	1/50	247	252	155	220	275	605	220	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	110	60	18×7	138	
175	5.5	1/60																								
	7.5		262	262	175	240	310	675	250	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	110	65	18×7	172	
200	11.0		285	305	200	280	360	749	290	305	390	40	24	300	250	350	6	M16	114	42	12×45.3	125	70	20×7.5	246	
250	11.0	15.0																								
	15.0		330	360	250	315	460	920	380	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	155	90	25×9	410	

WPWK 型



轴指向表示
SHAFT DIRECTION

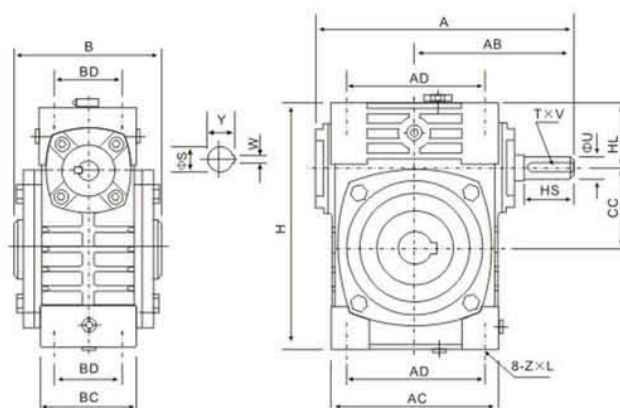

型号 size	减速比 ratio	A	AB	B	AC	BC	AD	BD	CC	HL	H	Z×L	输入轴input shaft			出力轴output shaft		重量 weight(kg)
													HS	U	T×V	S	W×Y	
40	1/10	149	89	90	95	61	78	42	40	35	125	M6×12	25	12	4×2.5	16	5×18.3	4
50		175	107	110	111	68	85	50	50	35	150	M6×18	30	12	4×2.5	20	6×22.8	6.5
60		198	122	120	127	76	105	55	60	42	177	M8×20	40	15	5×3	25	8×28.3	9
70		231	140	132	152	86	125	65	70	55	215	M10×25	40	18	6×3.5	30	8×33.3	13
80	1/20	261	160	150	169	102	140	70	80	65	250	M12×28	50	22	6×3.5	35	10×38.3	21
100	1/25	322	190	174	216	117	180	90	100	80	310	M12×30	50	25	8×4	40	12×43.3	34
120	1/30	381	229	180	256	124	220	100	120	95	370	M14×32	65	30	8×4	45	14×48.8	51
135	1/40	433	260	214	296	147	260	110	135	105	425	M16×35	75	35	10×5	60	18×64.4	78
155	1/50	504	302	256	345	185	280	120	155	103	461	M16×35	85	40	12×5	70	20×74.9	102
175	1/60	545	325	282	374	192	320	140	175	123	521	M16×35	85	45	14×5.5	80	22×85.4	142
200		587	350	324	412	230	360	150	200	130	575	M20×36	95	50	14×5.5	85	22×90.4	202
250		705	420	400	500	285	420	190	250	150	700	M24×42	110	60	18×7	110	28×116.4	340



WPWKA 型



WPWKS 型



轴指向表示
SHAFT DIRECTION

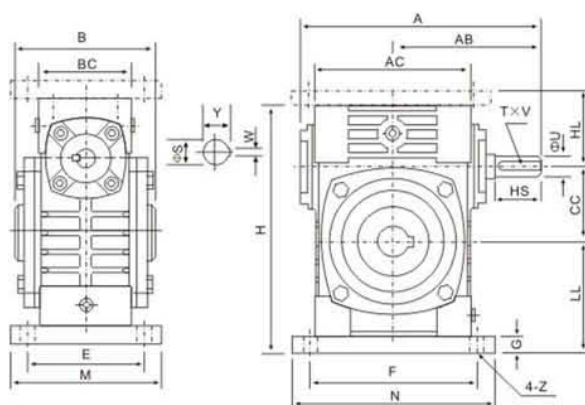



型号 size	减速比 ratio	A	AB	B	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	入力轴input shaft			出力轴output shaft		重量 weight(kg)
		HS	U	T×V	S	W×Y																
40	1/10	149	89	90	95	61	40	45	60	135	100	130	80	110	10	10	25	12	4×2.5	16	5×18.3	4.5
50		175	107	110	111	68	50	50	80	165	120	140	95	110	15	12	30	12	4×2.5	20	6×22.8	7.5
60		198	122	120	127	76	60	60	93	195	130	150	105	120	18	12	40	15	5×3	25	8×28.3	11.5
70		1/15	231	140	132	152	86	70	73	108	233	150	190	115	150	18	15	40	18	6×3.5	30	8×33.3
80	1/20	261	160	150	169	102	80	83	123	268	170	220	135	180	18	15	50	22	6×3.5	35	10×38.3	24
100	1/25	322	190	174	216	117	100	100	150	330	190	270	155	220	20	15	50	25	8×4	40	12×43.3	39
120	1/30	381	229	180	256	124	120	120	180	395	230	320	180	260	25	18	65	30	8×4	45	14×48.8	57
135	1/40	433	260	214	296	147	135	135	215	455	250	350	200	290	30	18	75	35	10×5	60	18×64.4	85
155	1/50	504	302	256	345	185	155	135	235	493	280	380	220	320	32	21	85	40	12×5	70	20×74.9	110
175	1/60	545	325	282	374	192	175	160	260	558	310	410	250	350	37	21	85	45	14×5.5	80	22×85.4	152
200		587	350	324	412	230	200	175	290	620	355	445	290	390	45	24	95	50	14×5.5	85	22×90.4	216
250		705	420	400	500	285	250	200	350	750	460	560	380	480	50	28	110	60	18×7	110	28×116.4	350

WPWKO 型



轴指向表示
SHAFT DIRECTION

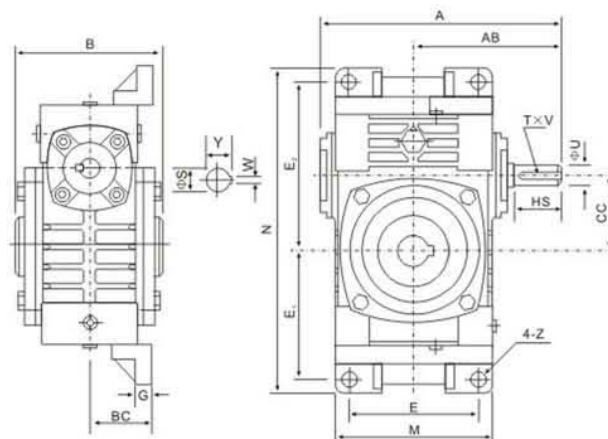

型号 size	减速比 ratio	A	AB	B	BC	CC	M	N	E	E ₁	E ₂	G	Z	入力轴input shaft			出力轴output shaft		重量 weight(kg)
														HS	U	T×V	S	W×Y	
40	1/10	149	89	90	45	40	95	187	70	72	97	12	10	25	12	4×2.5	16	5×18.3	5
50		175	107	110	50	50	111	226	90	90	110	14	12	30	12	4×2.5	20	6×22.8	8
60		198	122	120	55	60	127	257	100	102	129	15	12	40	15	5×3	25	8×28.3	11
70		231	140	132	65	70	152	305	120	120	155	20	15	40	18	6×3.5	30	8×33.3	15.5
80	1/20	261	160	150	70	80	174	350	140	140	180	20	15	50	22	6×3.5	35	10×38.3	24
100	1/25	322	190	174	90	100	224	410	190	165	215	22	15	50	25	8×4	40	12×43.3	38
120	1/30	381	229	180	100	120	264	494	220	195	255	25	18	65	30	8×4	45	14×48.8	56
135	1/40	433	260	214	110	135	304	559	260	230	285	30	18	75	35	10×5	60	18×64.4	84
155	1/50	504	302	256	140	155	345	605	290	250	305	35	21	85	40	12×5	70	20×74.9	129
175	1/60	545	325	282	150	175	374	675	320	273	348	40	21	85	45	14×5.5	80	22×85.4	157
200		587	350	324	175	200	424	749	370	305	390	40	24	95	50	14×5.5	85	22×90.4	224
250		705	420	400	200	250	510	920	440	375	475	45	28	110	60	18×7	110	28×116.4	374



WPWKT 型



WPWKV 型




轴指向表示
SHAFT DIRECTION

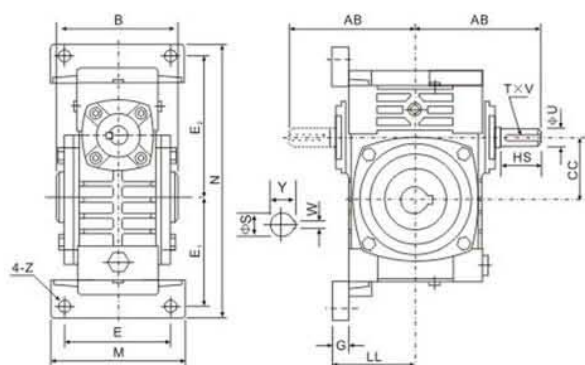


型号 size	减速比 ratio	AB	B	CC	LL	M	N	E	E ₁	E ₂	G	Z	入力轴input shaft			出力轴output shaft		重量 weight(kg)
													HS	U	T×V	S	W×V	
40	1/10	87	90	40	63	90	187	70	72	97	12	10	25	12	4×2.5	16	5×18.3	5
50		107	110	50	70	120	226	95	90	110	14	12	30	12	4×2.5	20	6×22.8	8
60		122	120	60	80	130	257	105	102	129	15	12	40	15	5×3	25	8×28.3	11
70		140	132	70	95	150	305	115	120	155	20	15	40	18	6×3.5	30	8×33.3	15.5
80	1/20	160	150	80	105	170	350	135	140	180	20	15	50	22	6×3.5	35	10×38.3	24
100	1/25	190	174	100	135	190	410	155	165	215	22	15	50	25	8×4	40	12×43.3	38
120	1/30	229	180	120	160	230	494	180	195	255	25	18	65	30	8×4	45	14×48.8	56
135	1/40	260	214	135	185	250	559	200	230	285	30	18	75	35	10×5	60	18×64.4	84
155	1/50	302	256	155	220	275	605	220	250	305	35	21	85	40	12×5	70	20×74.9	129
175	1/60	325	282	175	240	310	675	250	273	348	40	21	85	45	14×5.5	80	22×85.4	157
200		350	324	200	280	360	749	290	305	390	40	24	95	50	14×5.5	85	22×90.4	224
250		420	400	250	315	460	920	380	375	475	45	28	110	60	18×7	110	28×116.4	374

WPWDK 型

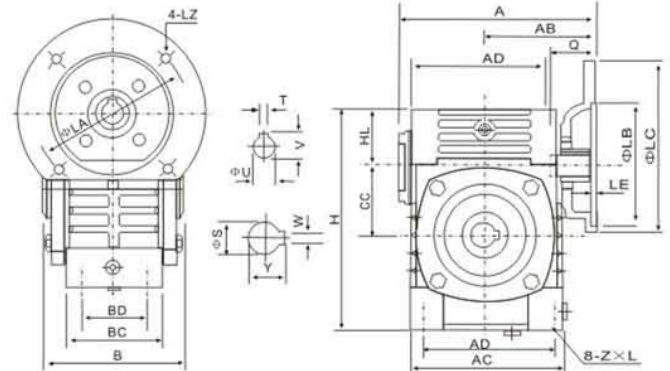


轴指向表示
SHAFT DIRECTION




型号 size	入功率 input(KW)	减速比 ratio	A	AB	B	AC	BC	AD	BD	CC	HL	H	Z×L	电机法兰flange					入力孔input hole			出力轴output shaft		重量 weight(kg)
														LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40	0.12	1/10	135	75	90	95	61	78	42	40	35	125	M6×12	115	95	140	4	M8	31	11	4×12.8	16	5×18.3	4
50	0.18		151	83	110	111	68	85	50	50	35	150	M6×18	115	95	140	4	M8	31	11	4×12.8	20	6×22.8	7
60	0.37		167	91	120	127	76	105	55	60	42	177	M8×20	130	110	160	4	M8	33	14	5×16.3	25	8×28.3	10
70	0.37		200	109	132	152	86	125	65	70	55	215	M10×25	130	110	160	4	M8	40	14	5×16.3	30	8×33.3	14.5
70	0.75		202	111	132	152	86	125	65	70	55	215	M10×25	165	130	200	4	M10	42	19	6×21.8	30	8×33.3	14.5
80	0.75	1/15	225	125	150	169	102	140	70	80	65	250	M12×28	165	130	200	4.5	M10	48	19	6×21.8	35	10×38.3	23
80	1.5		225	125	150	169	102	140	70	80	65	250	M12×28	165	130	200	4.5	M10	52	24	8×27.3	35	10×38.3	23
100	1.5	1/20	280	148	174	216	117	180	90	100	80	310	M12×30	165	130	200	4.5	M10	52	24	8×27.3	40	12×43.3	36.5
120	2.2		333	181	180	256	124	220	100	120	95	370	M14×32	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	54
120	3.0	1/30	333	181	180	256	124	220	100	120	95	370	M14×32	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	54
135	3.0		375	202	214	296	147	260	110	135	105	425	M16×35	215	180	250	5	M12	63	28	8×31.3	60	18×64.4	83
155	5.5	1/50	448	247	256	345	185	280	120	155	103	461	M16×35	265	230	300	5	M12	83	38	10×41.3	70	20×74.9	110
175	5.5		481	262	282	374	192	320	140	175	123	521	M16×35	265	230	300	5	M12	83	38	10×41.3	80	22×85.4	156
200	11.0	1/60	543	285	324	412	230	360	150	200	130	575	M20×36	300	250	350	6	M16	114	42	12×45.3	85	22×90.4	222
250	11.0		615	330	400	500	285	420	190	250	150	700	M24×42	300	250	350	6	M16	114	42	12×45.3	110	28×116.4	376

WPWDKA 型

WPWDKS 型

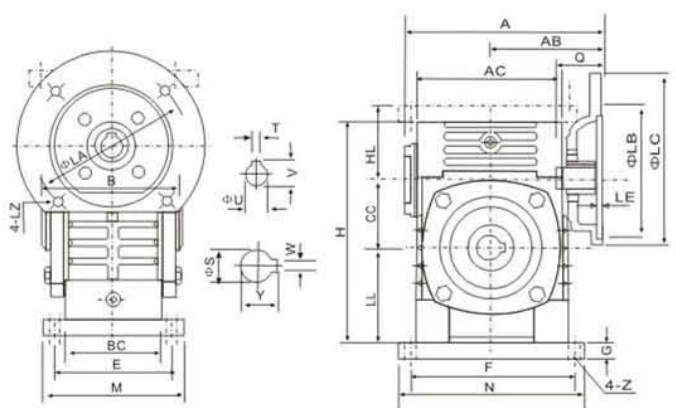


轴指向表示
SHAFT DIRECTION




型号 size	入功率 input(KW)	减速比 ratio	A	AB	B	AC	BC	CC	HL	LL	H	M	N	E	F	G	Z	电机法兰flange					入力孔input hole			出力轴output shaft		重量 weight(kg)
																		LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40	0.12	1/10	135	75	90	95	61	40	45	60	135	100	130	80	110	10	10	115	95	140	4	M8	31	11	4×12.8	16	5×18.3	5
50	0.18		151	83	110	111	68	50	50	80	165	120	140	95	110	15	12	115	95	140	4	M8	31	11	4×12.8	20	6×22.8	8
60	0.37		167	91	120	127	76	60	60	93	195	130	150	105	120	18	12	130	110	160	4	M8	33	14	5×16.3	25	8×28.3	12.5
70	0.37		200	109	132	152	86	70	73	108	233	150	190	115	150	18	15	130	110	160		M8	40	14	5×16.3	30	8×33.3	17
	0.75		202	111														165	130	200	4	M10	42	19	6×21.8			
80	0.75	1/15	225	125	150	169	102	80	83	123	268	170	220	135	180	18	15	165	130	200	4.5	M10	48	19	6×21.8	35	10×38.3	26
	1.5																						52	24	8×27.3			
100	1.5	1/20	280	148	174	216	117	100	100	150	330	190	270	155	220	20	15	165	130	200	4.5	M10	52	24	8×27.3	40	12×43.3	41.5
120	2.2	1/25	333	181	180	256	124	120	120	180	395	230	320	180	260	25	18	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	60
	3.0																											
135	3.0	1/40	375	202	214	296	147	135	135	215	455	250	350	200	290	30	18	215	180	250	5	M12	63	28	8×31.3	60	18×64.4	90
	4.0																											
155	5.5	1/60	448	247	256	345	185	155	135	235	493	280	380	220	320	32	21	265	230	300	5	M12	83	38	10×41.3	70	20×74.9	118
175	5.5		481	262	282	374	192	175	160	260	558	310	410	250	350	37	21	265	230	300	5	M12	83	38	10×41.3	80	22×85.4	167
	7.5		543	285	324	412	230	200	175	290	620	355	445	290	390	45	24	300	250	350	6	M16	114	42	12×45.3	85	22×90.4	237
200	11.0	1/60	615	330	400	500	285	250	200	350	750	460	560	380	480	50	28	300	250	350	6	M16	114	42	12×45.3	110	28×116.4	395
250	11.0																											
	15.0																											

WPWDKO 型

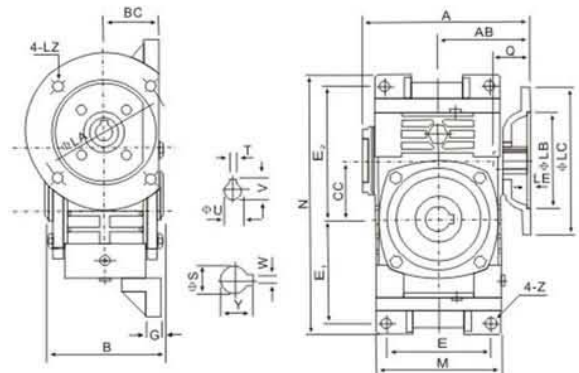


轴指向表示
SHAFT DIRECTION




型号 size	入功率 (input:KW)	减速比 ratio	A	AB	B	BC	CC	M	N	E	E ₁	E ₂	G	Z	电机法兰flange				入力孔input hole				出力轴output shaft		重量 weight(kg)
															LA	LB	LC	LE	LZ	Q	U	T×V	S	W×Y	
40	0.12	1/10	135	75	90	45	40	95	187	70	72	97	12	10	115	95	140	4	M8	31	11	4×12.8	16	5×18.3	5.4
50	0.18		151	83	110	50	50	111	226	90	90	110	14	12	115	95	140	4	M8	31	11	4×12.8	20	6×22.8	8.5
60	0.37		167	91	120	55	60	127	257	100	102	129	15	12	130	110	160	4	M8	33	14	5×16.3	25	8×28.3	12
70	0.37		200	109	132	65	70	152	305	120	120	155	20	15	130	110	160	4	M8	40	14	5×16.3	30	8×33.3	17
	0.75		202	111											165	130	200		M10	42	19	6×21.8			
80	0.75	1/15	225	125	150	70	80	174	350	140	140	180	20	15	165	130	200	4.5	M10	48	19	6×21.8	35	10×38.3	26
	1.5		52	24	8×27.3																				
100	1.5	1/20	280	148	174	90	100	224	410	190	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	40	12×43.3	40.5
120	2.2	1/25	333	181	180	100	120	264	494	220	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	59
	3.0																								
135	3.0	1/40	375	202	214	110	135	304	559	260	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	60	18×64.4	89
	4.0																								
155	5.5	1/60	448	247	256	140	155	345	605	290	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	70	20×74.9	138
175	5.5		481	262	282	150	175	374	675	320	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	80	22×85.4	172
	7.5																								
200	11.0		543	285	324	175	200	424	749	370	305	390	40	24	300	250	350	6	M16	114	42	12×45.3	85	22×90.4	246
250	11.0		615	330	400	200	250	510	920	440	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	110	28×116.4	410
	15.0																								

WPWDKT 型

WPWDKV 型

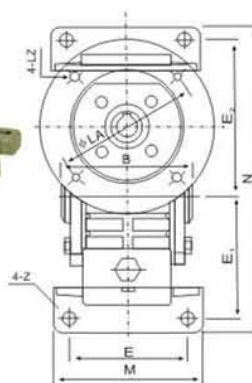


WPWDKT轴指向表示 WPWDKV轴指向表示
SHAFT DIRECTION SHAFT DIRECTION




型号 size	入功率 input(KW)	减速比 ratio	AC	B	CC	LL	M	N	E	E ₁	E ₂	G	Z	电机法兰flange				入力孔input hole			输出轴output shaft		重量 weight(kg)	
														LA	LB	LC	LE	LZ	Q	U	T×V	S		W×Y
40	0.12	1/10	75	90	40	63	90	187	70	72	97	12	10	115	95	140	4	M8	31	11	4×12.8	16	5×18.3	5.4
50	0.18		83	110	50	70	120	226	95	90	110	14	12	115	95	140	4	M8	31	11	4×12.8	20	6×22.8	8.5
60	0.37		91	120	60	80	130	257	105	102	129	15	12	130	110	160	4	M8	33	14	5×16.3	25	8×28.3	12
70	0.37		109	132	70	95	150	305	115	120	155	20	15	130	110	160	4	M8	40	14	5×16.3	30	8×33.3	17
	0.75		111											165	130	200		M10	42	19	6×21.8			
80	0.75	1/15	125	150	80	105	170	350	135	140	180	20	15	165	130	200	4.5	M10	48	19	6×21.8	35	10×38.3	26
	1.5		52	24	8×27.3																			
100	1.5	1/20	148	174	100	135	190	410	155	165	215	22	15	165	130	200	4.5	M10	52	24	8×27.3	40	12×43.3	40.5
120	2.2	1/25	181	180	120	160	230	494	180	195	255	25	18	215	180	250	5	M12	63	28	8×31.3	45	14×48.8	59
	3.0																							
135	3.0	1/40	202	214	135	185	250	559	200	230	285	30	18	215	180	250	5	M12	63	28	8×31.3	60	18×64.4	89
	4.0																							
155	5.5	1/50	247	256	155	220	275	605	220	250	305	35	21	265	230	300	5	M12	83	38	10×41.3	70	20×74.9	138
175	5.5	1/60	262	282	175	240	310	675	250	273	348	40	21	265	230	300	5	M12	83	38	10×41.3	80	22×85.4	172
	7.5																							
200	11.0		285	324	200	280	360	749	290	305	390	40	24	300	250	350	6	M16	114	42	12×45.3	85	22×90.4	246
250	11.0		330	400	250	315	460	920	380	375	475	45	28	300	250	350	6	M16	114	42	12×45.3	110	28×116.4	410
	15.0																							

WPWE 型

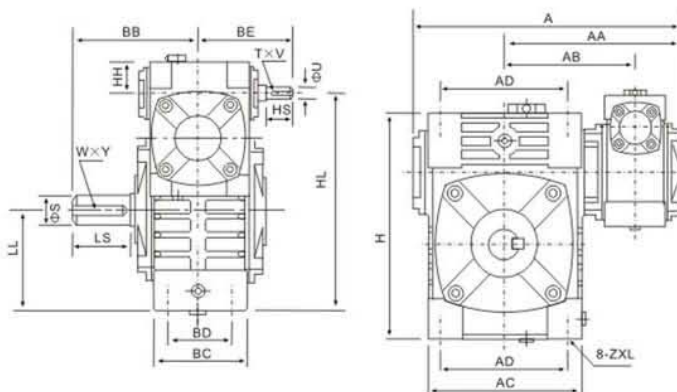


轴指向表示
SHAFT DIRECTION




型号 size	减速比 ratio	A	AA	AB	BB	BE	AC	BC	AD	BD	HH	HL	LL	H	ZxL	入力轴input hole			出力轴output shaft			重量 weight(kg)
																HS	U	T×V	LS	S	W×Y	
40-70	1/200	262	171	126	131	89	152	86	125	65	35	200	90	215	M10 X25	25	12	4×2.5	60	28	8×4	17
50-80		297	197	144	142	107	169	102	140	70	35	235	105	250	M12X28	30	12	4×2.5	65	32	10×5	28
60-100	1/300	363	231	175	169	122	216	117	180	90	42	290	130	310	M12X30	40	15	5×3	75	38	10×5	43
70-120	1/400	408	256	193	190	140	256	124	220	100	55	345	155	370	M14X32	40	18	6×3.5	85	45	14×5.5	64
80-135	1/500	471	298	226	210	160	296	147	260	110	65	400	185	425	M16X35	50	22	6×3.5	95	55	16×6	99
100-155	1/600	555	354	269	252	190	345	185	280	120	80	458	203	461	M16X35	50	25	8×4	110	60	18×7	136
120-175	1/800	598	379	287	262	229	374	192	320	140	95	518	223	521	M16X35	65	30	8×4	110	65	18×7	193
135-200	1/900	662	425	318	305	260	412	230	360	150	105	580	245	575	M20X36	75	35	10×5	125	70	20×7.5	280
155-250		795	510	380	360	302	500	285	420	190	103	705	300	700	M24X42	85	40	12×5	155	90	25×9	442

WPEA 型

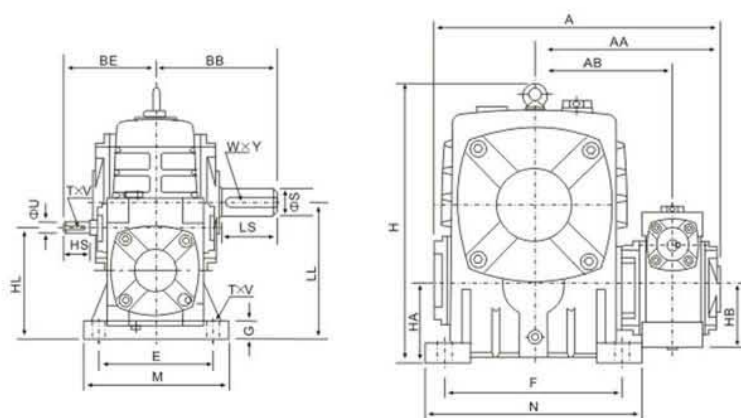

轴指向表示
SHAFT DIRECTION



型号 size	减速比 ratio	A	AA	AB	BB	BE	HL	LL	H	HA	HB	M	N	E	F	G	Z	入力轴input hole			出力轴output shaft			重量 weight(kg)
																		HS	U	T×V	LS	S	W×Y	
40-70	1/200	262	171	126	131	89	110	140	236	70	50	150	190	115	150	20	15	25	12	4×2.5	60	28	8×4	20
50-80		297	197	144	142	107	130	160	268	80	65	170	220	135	180	20	15	30	12	4×2.5	65	32	10×5	27
60-100	1/300	363	231	175	169	122	160	200	336	100	75	190	270	155	220	25	15	40	15	5×3	75	38	10×5	44
70-120	1/400	408	256	193	190	140	190	240	430	120	90	230	320	180	260	30	18	40	18	6×3.5	85	45	14×5.5	73
80-135	1/500	471	298	226	210	160	215	270	480	135	105	250	350	200	290	30	18	50	22	6×3.5	95	55	16×6	101
80-147	1/600	476	301	229	212	160	203	270	501	123	105	250	350	200	280	32	18	50	22	6×3.5	95	55	16×6	112
100-155	1/800	555	354	269	252	190	235	290	531	135	130	275	390	220	320	35	21	50	25	8×4	110	60	18×7	144
120-175	1/900	598	379	287	262	229	280	335	600	160	155	310	430	250	350	40	21	65	30	8×4	110	65	18×7	201
135-200		662	425	318	305	260	310	375	666	175	185	360	480	290	390	40	24	75	35	10×5	125	70	20×7.5	293
155-250		795	510	380	360	302	355	450	800	200	203	460	560	380	480	45	28	85	40	12×5	155	90	25×9	462